

# Avoiding Traffic Congestion Using Position based and Cognitive Radio in VANET

K. Anita Davamani, S. Amudha

Received: 12 December 2016 • Revised: 15 January 2017 • Accepted: 14 February 2017

**Abstract:** Inter-Vehicle Communication System (IVCS) built in a city environment faces greater challenges because of uneven distribution of vehicular nodes, mobility constrained, and difficult signal reception due to radio obstacles such as high rise buildings. This paper proposes a new position-based routing scheme designed specifically for IVCS in a city environment and for the roadside equipment using a Cognitive Radio to allocate a multiple channel for communicating between vehicles and infrastructure to provide a safety messaging to handle emergency situation. Currently VANET is implemented using ETT and ETX system which uses Waited Corrective (WC ETT) mechanism. The delay incurred in this system is improved here by making use of Cognitive Radio which allocates multiple channels simultaneously. This paper also proposes to use A-star Algorithm for inter-vehicle communication which supports dynamic status updates on neighbors, sink and their energy levels so as to extended WSN lifetime.

**Keywords:** Vehicular Communication, A-star Algorithm, Fuzzy Logic, Cognitive Radio, Roadside Infrastructure, Position based Routing.

## INTRODUCTION

A Vehicular Ad-Hoc Network, or VANET, is a form of Mobile Ad-Hoc Network, to provide communication among nearby vehicles and between vehicles and nearest fixed equipment, usually described as Roadside Equipment. The VANET used to providing safety and comfort for passenger. Having VANET inside vehicle need only small electronic device, which will provide Ad-Hoc Network connectivity for the passengers inside the vehicle. By this device operating this network does not need complicated connection and server communication. Each vehicle equipped with VANET device will be a node in the Ad-Hoc network and can receive and relay others messages through the wireless network. In vehicular Ad-Hoc network using different ad-hoc networking technologies such as Wi-Fi IEEE 802.11 b/g, WiMAX IEEE 802.16, Bluetooth, IRA, ZigBee for easy, accurate, effective and simple communication between vehicles on dynamic mobility.

### Vehicular Ad-Hoc Networks

VANETs have turned into an important research area over the last few years. VANETs are distinguished from MANET by their hybrid network architectures, node movement characteristics, and new application scenarios.

### Characteristics

Drive behavior, constraints on mobility, and high speeds create unique Characteristics in VANETs. These characteristics distinguish them from other mobile ad hoc networks, and the major characteristics are as follows:

- High mobility and Rapid changing topology
- Geographic position available
- Mobility modeling and predication
- Hard delay constraints
- No power constraint

---

K. Anita Davamani, Assistant Professor, Department of Computer Science and Engineering, BIST, BIHER, Bharath Institute of Higher Education & Research, Selaiyur, Chennai E-mail: anitadavamani@gmail.com

S. Amudha, Assistant Professor, Department of Computer Science and Engineering, BIST, BIHER, Bharath Institute of Higher Education & Research, Selaiyur, Chennai. E-mail: amudha17s@gmail.com

## Routing Information Used In Packet Forwarding

This class is divided into two subclasses: topology-based and position-based routing protocols. In topology-based routing, each node should be aware of the network layout, also should be able to forward packets using information about available nodes and links in the network. In contrast, position-based routing should be aware of the nodes locations in the packet forwarding.

### Topology-based Routing Protocols

Topology-based routing protocol usually a traditional MANET routing protocol, it uses link's information which stored in the routing table as a basis to forward packets from source node to destination; it commonly categorized into three categories (base on underlying architecture) Proactive (periodic), Reactive (on-demand) and Hybrid.

### Reactive Routing Protocols

Reactive routing protocol (also called as On-Demand) reduce the network overhead by maintaining routes only when needed, that the source node start a process of route discovery and made a route request message to the destination. After the message received by destination it will send a route reply message to the source node.

### Ad-Hoc On-Demand Distance Vector

AODV offers low network overhead by reducing message flooding in network that when compared to proactive routing protocols, besides reducing the requirement of memory size and by minimizing the routing tables which keep only entries for recent active routes, also keeps next hop for a route rather than the whole route. It also providing dynamically updates for adapting the route condition and eliminated looping in routes by using destination sequence number. However, it causes large delays in a route discovery, also route failure may require a new route discovery which produces additional delays that decrease the data transmission rate and increase the network overhead

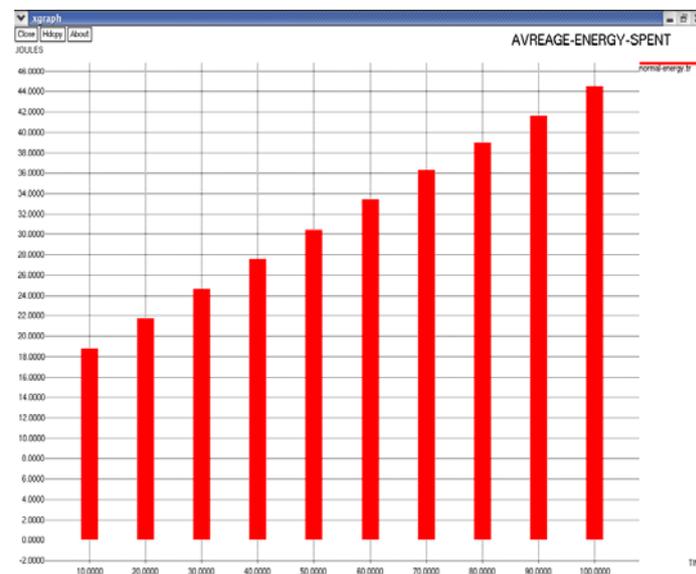


Fig. 1: Energy Estimation of AODV

### Position-based Routing Protocols

Position or geographic routing protocol is based on the positional information in routing process; where the source sends a packet to the destination using its geographic position rather than using the network address. When the source need to send a packet, it usually stores the position of the destination in the packet header which will help in forwarding the packet to the destination without needs to route discovery, route maintenance, or even awareness of the network topology.

### Challenges of Position-Based Routing in IVCS

The challenges of position-based routing in a city environment Suppose node  $s$  wants to send a packet to node  $d$ . Greedy forwarding will fail in this case as there is no neighbor of  $s$ , which is nearer to  $d$  than  $s$  itself. Such a situation is what is commonly known as *local maximum*. Following the strategy in GPSR, the packet enters into perimeter-mode, using the right hand rule to travel through each node on the dotted route, including nodes  $a$ ,  $b$  and  $c$ .

At  $b$ , it is found that  $c$  is nearer to  $d$  than  $s$ , at which the packet enters into perimeter-mode. Thus, the packet switches back to greedy mode at  $b$ , and then reaches its destination  $d$  through  $c$ . It can be seen that this route is very long in terms of hop count. In fact,  $s$  can reach  $a$ , and  $a$  can reach  $b$ , both in one hop. This shows that the perimeter-mode which packet employs to recover from local maximum is very inefficient and time-consuming. Another observation is that the packet can actually travel from  $s$  to  $d$  via a route that passes through  $e$  and  $f$  (shown as solid line), which is much shorter.

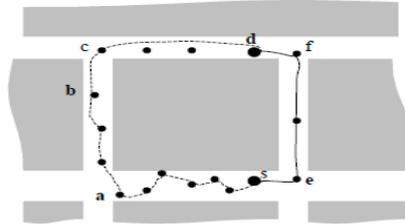


Fig. 2: Challenges of position-based routing in IVCS

However, this route is not exploited because the perimeter-mode of GPSR based on right hand rule is biased to a specific direction when selecting for the next hop. It should be noted that in a city environment, the constrained mobility and frequently encountered obstacles can effectively force GPSR to run into perimeter-mode frequently. As a result, the performance of GPSR could deteriorate dramatically, and therefore may not be suitable for IVCS.

### Anchor-based Street and Traffic Aware Routing

A-star search algorithm is a widely used graphic searching algorithm. It is also a highly efficient heuristic algorithm used in finding a variable or low cost path. It is considered as one of the best intelligent search algorithms that combines the merits of both depth-first search algorithm and breadth-first algorithm.

A-star path searching algorithm uses the evaluation function (usually denoted  $f(n)$ ) to guide and determine the order in which the search visits nodes in the tree. The evaluation function is given as:

$$f(n) = g(n) + h(n)$$

where  $g(n)$  is the actual cost from the initial node (start node) to node  $n$  (i.e. the cost finding of optimal path),  $h(n)$  is the estimated cost of the optimal path from node  $n$  to the target node (destination node), which depends on the heuristic information of the problem area. Generally, A-star algorithm maintains two lists, an OPEN list and a CLOSE list. The OPEN list is a priority queue and keeps track of the nodes in it to find out the next node with least evaluation function to pick. The CLOSE list keeps track of nodes that have already been examined. Initially, the OPEN list contains the starting node. When it iterates once, it takes the top of the priority list, and then checks whether it is the goal node (destination node). If so, the algorithm is done. Otherwise, it calculates the evaluation function of all adjacent nodes and adds them to the OPEN list. After the A-star algorithm is completed, it will find a solution if a solution exists. If it doesn't find a solution, then it can guarantee that no such solution exists. A-star algorithm will find a path with the lowest possible cost. This will depend heavily upon the quality of the cost function and estimates provided.

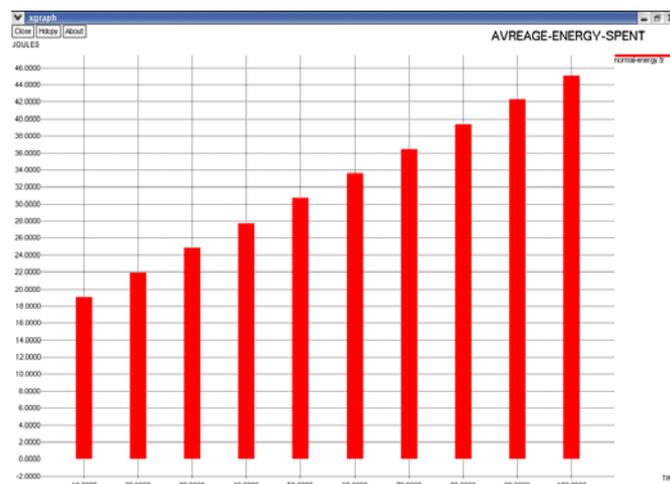


Fig. 3: Energy Estimation of A-STAR

**A-star algorithm may be expressed as following:**

1. Put the source node  $s_0, f(s_0)$  attached, into the OPEN list. Let the CLOSE list is empty.
2. If the OPEN is empty, exit, and the search is fail.
3. Move out the first node  $N$  form the OPEN list, which has the smallest  $f(.)$  in the list, and put it into the CLOSE list; number the node as  $n$ .
4. If the node  $N$  is the goal node, the search is finished, *exits*.
5. If the node  $N$  cannot spread, turn to *step 2*.
6. Spread the node  $N$ , there will be a group of nodes, all of which are  $f(n)$  attached; add the nodes to the OPEN list, then turn to *step 3*; Especially, for the gotten nodes in this step, some processing will be done as follows:
  - a) Examine the OPEN list and the CLOSE list to find whether (some of) the nodes have been included in them. For the nodes that have been included, if they are ancestor node of the node  $N$ , delete them; If they are not (the ancestor node), delete them too, but for they are spread on the second time, it is needed to review them and find whether the corresponding  $f(n)$ , the back pointers of the nodes and even those of the corresponding descendant nodes are needed to be changed. The rule of such changing is “choosing the short path based on  $f(n)$ .”
  - b) For the nodes that have not been included in the OPEN lit and the CLOSE list, put them into the OPEN after assigning the back pointer that points to the node  $N$ , then, based on  $f(n)$ , sort all the nodes in the OPEN list in ascending order.

**RELATED WORK**

**Implementation of A-STAR**

In the new routing method, the base station prepares the routing schedule and broadcast it to each node. A-star algorithm which is used to find the optimal route from the node to the base station is applied to each node. A-star algorithm creates a tree structure in order to search optimal routing path from a given node to the base station.

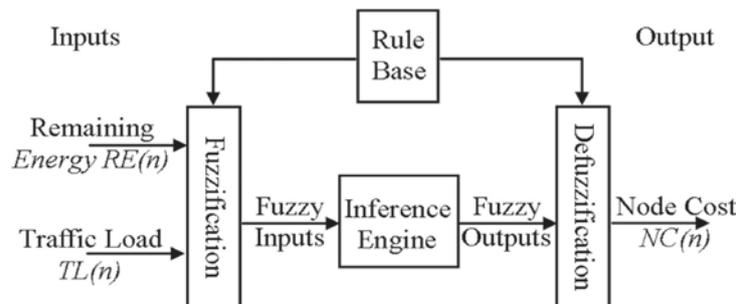


Fig. 4: Fuzzy structure with two inputs (remaining energy and traffic load) and one output (node cost)

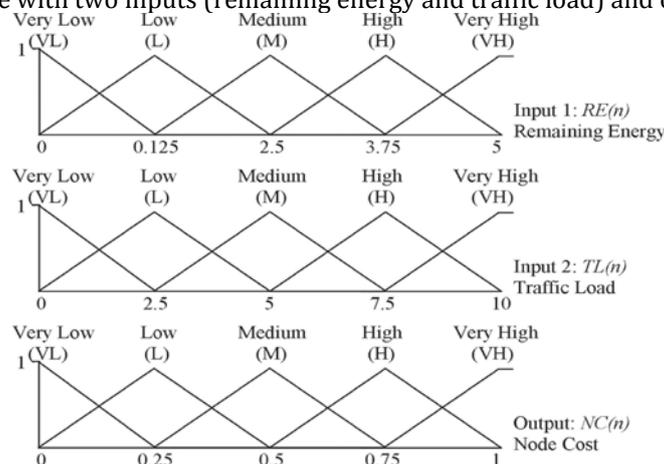


Fig. 5: Membership graph for the inputs (remaining energy and traffic load) and the output (node cost)

The tree node is explored based on its *evaluation function*  $f(n)$

The function we used is given as:

$$f(n) = NC(n) + (1/MH(n)).$$

Where  $NC(n)$  is the node cost of node  $n$ , which takes value  $[0...1]$ , and can be calculated by the fuzzy approach. The fuzzy approach is considered for the remaining energy and the traffic load of node  $n$  to calculate the optimal cost for node  $n$ .  $MH(n)$  is the short distance from node  $n$  to the base station. As a result, the node  $n$  that has largest  $f(n)$  value will be chosen as the optimal node.

### Cognitive Radio

Cognitive radio is used for passing message from roadside unit to vehicles with using a access point with the beacon message for each area to obtain the information of moving vehicles in that area and the vehicle moved out from that region the next access point will provide the information to the vehicle. So that cognitive radio maintain access point for each and every area to obtain the information of the vehicle and provide the safety message to the vehicle to avoid emergency event occurred in that area so that the driver will slow down the vehicles to avoid accident and traffic in that place. They use ETX and ETT in combination of WCETT using OLSR routing protocol for finding vehicles information and used a terms are

### ETX

ETX, Expected Transmission Count, is an attempt to create a metric better suited for wireless networks. The metric represents the number of times a node expects to send or resend a packet for the receiving node to receive a non-corrupt packet. However, the metric does not consider link speed or available bandwidth. ET X is calculated as

$$ETX=1/LQ*NLQ$$

Where LQ is the link quality and NLQ is the neighbor link quality.

### ETT

ETT, Expected Transmission Time, is a metric that is built on ETX. ETT tries to estimate the time it would take to send a packet on a link by multiplying the ETX with the size of the packet divided by the link capacity as shown in Equation 2. This gives the time it should take to send a packet including the resends if needed.

**ETT is calculated using the following algorithm**

$$ETT=ETX*S/B$$

Where S is the packet size, which is measured in bytes and B is the link capacity, which is measured using packet-pair technique.

## PERFORMANCE EVALUATION

Energy Model, as implemented in *ns*, is a node attribute. The energy model represents level of energy in a mobile host. The energy model in a node has a initial value which is the level of energy the node has at the beginning of the simulation. This is known as *initialEnergy\_*. It also has a given energy usage for every packet it transmits and receives. These are called *txPower\_* and *rxPower\_*. *EnergyModel(energy)* requires the initial-energy to be passed along as a parameter.

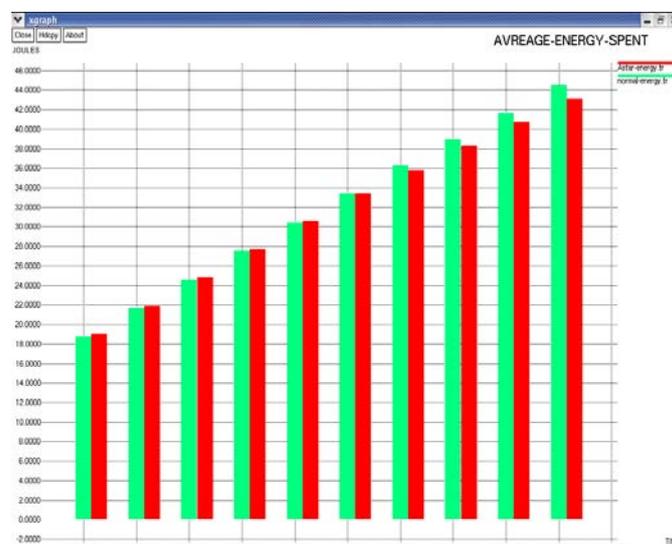


Fig. 6: Energy Estimation for AODV and A-STAR

The other class methods are used to decrease the energy level of the node for every packet transmitted (  $\text{DecrTxEnergy}(\text{txtime}, P_{\text{tx}})$ ) and every packet received (  $\text{DecrRcvEnergy}(\text{rcvtime}, P_{\text{rcv}})$ ) by the node.  $P_{\text{tx}}$  and  $P_{\text{rcv}}$  are the transmitting and receiving power (respectively) required by the node's interface or PHY. At the beginning of simulation,  $\text{energy}_i$  is set to  $\text{initialEnergy}_i$  which is then decremented for every transmission and reception of packets at the node. When the energy level at the node goes down to zero, no more packets can be received or transmitted by the node. If tracing is turned on, line Likewise the performance is made for delay, throughput and packet delivery ratio between AODV and A-STAR to show the better performance of A-STAR because A-STAR will check the high efficient node in the network to deliver the packet to the destination so that energy can be saved for the remaining nodes in the network

The average end-to-end delay of data packets is the interval between the data packet generation time and the time when the last bit arrives at the destination. We vary the simulation time and calculate end to end delay. We run these simulations for AODV and A-STAR individually, the number of nodes is 50. The simulation time is 10, 20, 30, 40, 50 and 100 seconds. Figure 7 shows the plot for average end-to-end delay versus simulation time when number of nodes is 50, the comparison is made between AODV and A-STAR.

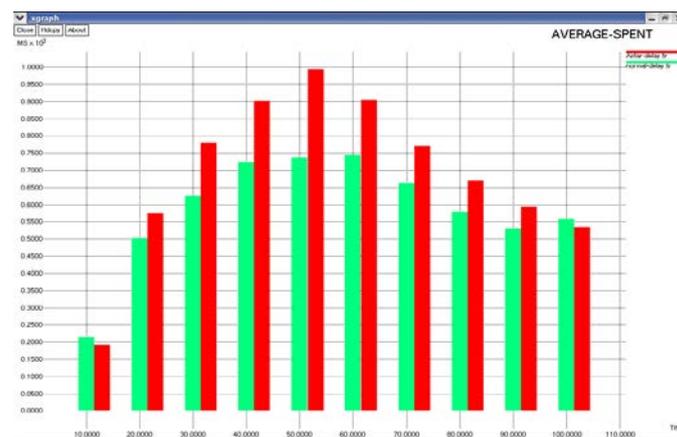


Fig. 7: Delay for AODV and A-STAR

It is one of the dimensional parameters of the network which gives the fraction of the channel capacity used for useful transmission selects a destination at the beginning of the simulation i.e., information whether or not data packets correctly delivered to the destinations. Throughput is the average rate of successful data packets received at destination. It is usually measured in bits per second (bit/s or bps), and sometimes in data packets per second



Fig. 8: Throughput for AODV and A-STAR

In this division, packet delivery ratio is compared with number of nodes as shown in Fig. 9. In the beginning, the packet delivery ratio is less due to less number of vehicles. Packet delivery ratio is calculated by dividing the number of packets received by the destination through the number of packets originated by the CBR source. The number of packets dropped does not take into account retransmissions. This would effectively make the number of transmitted packets equal to the sum of the number of received packets and number of dropped packets.



Fig. 9: Packet delivery ratio for AODV and A-STAR Conclusion

This project has high social relevance and usefulness to provide a safety message to all the vehicles in the environment to avoid unwanted event in the network so that communication has been made between Vehicle to vehicle using A-star protocol as well as vehicle to infrastructure using cognitive radio using access point to allocate multiple channel in the network region to the vehicles so that the message can be send to vehicle and from the end of the network region from that vehicle the message has been passed to the next region of the network using access point to provide a information to the vehicle by using infrastructure so that the delay can be reduced by using a cognitive radio

### ACKNOWLEDGEMENT

I would like to express my sincere gratitude to my guide Dr. G Geetha, Professor, Department of Computer Science and Engineering, Jerusalem College of Engineering, for her guidance, constant encouragement and support. Her extensive vision and creative thinking has been a source of inspiration for me since this time.

### REFERENCES

- [1] Das, J., Das, M. P., & Velusamy, P. (2013). Sesbania grandiflora leaf extract mediated green synthesis of antibacterial silver nanoparticles against selected human pathogens. *Spectrochimica Acta Part A: Molecular and Biomolecular Spectroscopy*, 104, 265-270.
- [2] Umanath, K.P.S.S.K., Palanikumar, K., & Selvamani, S. T. (2013). Analysis of dry sliding wear behaviour of Al6061/SiC/Al<sub>2</sub>O<sub>3</sub> hybrid metal matrix composites. *Composites Part B: Engineering*, 53, 159-168.
- [3] Sindhu, N., & Archana, M. (2015). Analysis of a Double-Tail Comparator for Low-Power Applications. *International Journal of Advances in Engineering and Emerging Technology*, 7(3), 102-121.
- [4] Nageswaran, M.K. (2014). Improved Security in Mobile ADHOC Networks by Enhancing the Security of Pro-Active Protocols. *Excel International Journal of Technology, Engineering and Management*, 1(2), 46-50.
- [5] S. Anitha and Dr.C.P. Chandran, (2016). Review on Analysis of Gene Expression Data Using Biclustering Approaches. *Bonfring International Journal of Data Mining*, 6(2), 16-23.
- [6] Kondori, M.A.P., & Peashdad, M.H. (2015). Analysis of challenges and solutions in cloud computing security. *International Academic Journal of Innovative Research*, 2(5), 1-11.
- [7] Ananth, C., Rajavel, S.E., Annadurai, I., Mydeen, A., Sudalai, C., & Kingston, M.R. (2014). Faq-Mast TCP for Secure Download. *International Journal of Communication and Computer Technologies*, 2(1), 47-55.
- [8] Han, S.R., & Noah, M. (2017). Android Mobile Guardian System Security Architecture for Handset and Data Security. *Bonfring International Journal of Industrial Engineering and Management Science*, 7(1), 25-28.
- [9] Umamaheswari, T.S., & Dr.Sumathi, P. (2018). Review of Gene Selection and Prediction Using Data Mining Methods. *Journal of Computational Information Systems*, 14(4), 114 - 121.

- [10] Dr.Gomathi, P.M. and Dr.Karthika, D. (2018). Hybrid Adaptive Neuro-Fuzzy Inference System-Runge-Kutta Classification and Extracted the Eye Movement Features. *Journal of Computational Information Systems*, 14(4), 132 - 143.
- [11] Sumathi, M., & Dr.Thilagavathy, N. (2018). Analysis of ICT Services in Smart Libraries. *Journal of Computational Information Systems*, 14(4), 159 - 163.
- [12] Sadeghi, M. (2015). Improving the GPU performance prediction models to design space exploration. *International Academic Journal of Science and Engineering*, 2(6), 1-16.
- [13] Udayakumar, R., Khanaa, V., Saravanan, T., & Saritha, G. (1786). Cross layer optimization for wireless network (WIMAX). *Middle-East Journal of Scientific Research*, 16(12), 1786-1789.
- [14] Kumaravel, A., & Rangarajan, K. (2013). Algorithm for automaton specification for exploring dynamic labyrinths. *Indian Journal of Science and Technology*, 6(5S), 4554-4559.
- [15] Pieger, S., Salman, A., & Bidra, A.S. (2014). Clinical outcomes of lithium disilicate single crowns and partial fixed dental prostheses: a systematic review. *The Journal of prosthetic dentistry*, 112(1), 22-30.
- [16] Vijayaraghavan, K., Nalini, S.K., Prakash, N.U., & Madhankumar, D. (2012). One step green synthesis of silver nano/microparticles using extracts of *Trachyspermum ammi* and *Papaver somniferum*. *Colloids and Surfaces B: Biointerfaces*, 94, 114-117.
- [17] Khanaa, V., Mohanta, K., & Satheesh, B. (2013). Comparative study of uwb communications over fiber using direct and external modulations. *Indian Journal of Science and Technology*, 6(6), 4845-4847.
- [18] Khanaa, V., Thooyamani, K. P., & Udayakumar, R. (1798). Cognitive radio based network for ISM band real time embedded system. *Middle-East Journal of Scientific Research*, 16(12), 1798-1800.
- [19] Vijayaraghavan, K., Nalini, S.K., Prakash, N.U., & Madhankumar, D. (2012). Biomimetic synthesis of silver nanoparticles by aqueous extract of *Syzygium aromaticum*. *Materials Letters*, 75, 33-35
- [20] Caroline, M.L., Sankar, R., Indirani, R.M., & Vasudevan, S. (2009). Growth, optical, thermal and dielectric studies of an amino acid organic nonlinear optical material: l-Alanine. *Materials Chemistry and Physics*, 114(1), 490-494.
- [21] Kumaravel, A., & Pradeepa, R. (2013). Efficient molecule reduction for drug design by intelligent search methods. *International Journal of Pharma and Bio Sciences*, 4(2), B1023-B1029.
- [22] Kaviyarasu, K., Manikandan, E., Kennedy, J., Jayachandran, M., Ladchumananandasivam, R., De Gomes, U. U., & Maaza, M. (2016). Synthesis and characterization studies of NiO nanorods for enhancing solar cell efficiency using photon upconversion materials. *Ceramics International*, 42(7), 8385-8394.
- [23] Sengottuvel, P., Satishkumar, S., & Dinakaran, D. (2013). Optimization of multiple characteristics of EDM parameters based on desirability approach and fuzzy modeling. *Procedia Engineering*, 64, 1069-1078.
- [24] Anbuselvi S., Chellaram, C., Jonesh S., Jayanthi L., & Edward J.K.P. (2009). Bioactive potential of coral associated gastropod, *Trochus tentorium* of Gulf of Mannar, Southeastern India. *J. Med. Sci*, 9(5), 240-244.
- [25] Kaviyarasu, K., Ayeshamariam, A., Manikandan, E., Kennedy, J., Ladchumananandasivam, R., Gomes, U. U., & Maaza, M. (2016). Solution processing of CuSe quantum dots: Photocatalytic activity under RhB for UV and visible-light solar irradiation. *Materials Science and Engineering: B*, 210, 1-9.
- [26] Kumaravel, A., & Udayakumar, R. (2013). Web portal visits patterns predicted by intuitionistic fuzzy approach. *Indian Journal of Science and Technology*, 6(5S), 4549-4553.
- [27] Srinivasan, V., & Saravanan, T. (2013). Reformation and market design of power sector. *Middle-East Journal of Scientific Research*, 16(12), 1763-1767.
- [28] Kaviyarasu, K., Manikandan, E., Kennedy, J., & Maaza, M. (2015). A comparative study on the morphological features of highly ordered MgO: AgO nanocube arrays prepared via a hydrothermal method. *RSC Advances*, 5(100), 82421-82428.
- [29] Kumaravel, A., & Udhayakumarapandian, D. (2013). Construction of meta classifiers for apple scab infections. *International Journal of Pharma and Bio Sciences*, 4(4), B1207-B1213.
- [30] Sankari, S. L., Masthan, K. M. K., Babu, N. A., Bhattacharjee, T., & Elumalai, M. (2012). Apoptosis in cancer-an update. *Asian Pacific journal of cancer prevention*, 13(10), 4873-4878

- [31] Harish, B. N., & Menezes, G. A. (2011). Antimicrobial resistance in typhoidal salmonellae. *Indian journal of medical microbiology*, 29(3), 223-229.
- [32] Manikandan, A., Manikandan, E., Meenatchi, B., Vadivel, S., Jaganathan, S. K., Ladchumananandasivam, R., & Aanand, J. S. (2017). Rare earth element (REE) lanthanum doped zinc oxide (La: ZnO) nanomaterials: synthesis structural optical and antibacterial studies. *Journal of Alloys and Compounds*, 723, 1155-1161.
- [33] Caroline, M. L., & Vasudevan, S. (2008). Growth and characterization of an organic nonlinear optical material: L-alanine alaninium nitrate. *Materials Letters*, 62(15), 2245-2248.
- [34] Saravanan T., Srinivasan V., Udayakumar R. (2013). A approach for visualization of atherosclerosis in coronary artery, Middle - East Journal of Scientific Research, 18(12), 1713-1717.
- [35] Poongothai, S., Ilavarasan, R., & Karrunakaran, C.M. (2010). Simultaneous and accurate determination of vitamins B1, B6, B12 and alpha-lipoic acid in multivitamin capsule by reverse-phase high performance liquid chromatographic method. *International Journal of Pharmacy and Pharmaceutical Sciences*, 2(4), 133-139.
- [36] Udayakumar, R., Khanaa, V., & Saravanan, T. (2013). Synthesis and structural characterization of thin films of SnO<sub>2</sub> prepared by spray pyrolysis technique. *Indian Journal of Science and Technology*, 6(6), 4754-4757
- [37] Anbazhagan, R., Satheesh, B., & Gopalakrishnan, K. (2013). Mathematical modeling and simulation of modern cars in the role of stability analysis. *Indian Journal of Science and Technology*, 6(5S), 4633-4641.
- [38] Caroline, M.L., & Vasudevan, S. (2009). Growth and characterization of bis thiourea cadmium iodide: A semiorganic single crystal. *Materials Chemistry and Physics*, 113(2-3), 670-674.
- [39] Sharmila, S., Jeyanthi Rebecca, L., & Das, M. P. (2012). Production of Biodiesel from Chaetomorpha antennina and Gracilaria corticata. *Journal of Chemical and Pharmaceutical Research*, 4(11), 4870-4874.
- [40] Thooyamani, K.P., Khanaa, V., & Udayakumar, R. (2013). An integrated agent system for e-mail coordination using jade. *Indian Journal of Science and Technology*, 6(6), 4758-4761.
- [41] Caroline, M. L., Kandasamy, A., Mohan, R., & Vasudevan, S. (2009). Growth and characterization of dichlorobis L-proline Zn (II): A semiorganic nonlinear optical single crystal. *Journal of Crystal Growth*, 311(4), 1161-1165.
- [42] Caroline, M.L., & Vasudevan, S. (2009). Growth and characterization of L-phenylalanine nitric acid, a new organic nonlinear optical material. *Materials Letters*, 63(1), 41-44.
- [43] Kaviyarasu, K., Xolile Fuku, Genene T. Mola, E. Manikandan, J. Kennedy, and M. Maaza. Photoluminescence of well-aligned ZnO doped CeO<sub>2</sub> nanoplatelets by a solvothermal route. *Materials Letters*, 183(2016), 351-354.
- [44] Saravanan, T., & Saritha, G. (2013). Buck converter with a variable number of predictive current distributing method. *Indian Journal of Science and Technology*, 6(5S), 4583-4588.
- [45] Parthasarathy, R., Ilavarasan, R., & Karrunakaran, C. M. (2009). Antidiabetic activity of Thespesia Populnea bark and leaf extract against streptozotocin induced diabetic rats. *International Journal of PharmTech Research*, 1(4), 1069-1072.
- [46] Hanirex, D. K., & Kaliyamurthie, K. P. (2013). Multi-classification approach for detecting thyroid attacks. *International Journal of Pharma and Bio Sciences*, 4(3), B1246-B1251
- [47] Kandasamy, A., Mohan, R., Lydia Caroline, M., & Vasudevan, S. (2008). Nucleation kinetics, growth, solubility and dielectric studies of L-proline cadmium chloride monohydrate semi organic nonlinear optical single crystal. *Crystal Research and Technology: Journal of Experimental and Industrial Crystallography*, 43(2), 186-192.
- [48] Srinivasan, V., Saravanan, T., Udayakumar, R., & Saritha, G. (2013). Specific absorption rate in the cell phone user's head. *Middle-East Journal of Scientific Research*, 16(12), 1748-50.
- [49] Udayakumar R., Khanaa V., & Saravanan T. (2013). Chromatic dispersion compensation in optical fiber communication system and its simulation, Indian Journal of Science and Technology, 6(6), 4762-4766.
- [50] Vijayaragavan, S.P., Karthik, B., Kiran, T.V.U., & Sundar Raj, M. (1990). Robotic surveillance for patient care in hospitals. *Middle-East Journal of Scientific Research*, 16(12), 1820-1824.